

beldam lascar seals limited


Lascar Works, Hounslow, Middlesex, England TW3 3JL

Tel 020 8570 7722 Intl Tel +4420 8570 7722

Fax 020 8570 4438 Intl Fax +4420 8570 4438

www.beldamlascarseals.co.uk

beldam lascar gauge glasses

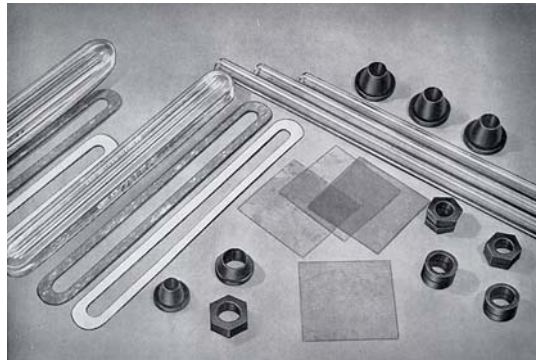

Description & Service

Prime requirements of a reliable gauge glass are resistance to fluctuating steam pressures and temperatures and an ability to withstand the erosive effects of high pressure steam for long periods. They are regularly used for steam pressures up to 400lb. sq. in. and in service with high pressure steam will often resist erosion for periods of a year or longer.

These gauge glasses are machine drawn from a special composition that has an exceptionally low coefficient of expansion combined with excellent transparency. For increased visibility, glasses are available with a red line fused into the material, against which the water-levels stand out most clearly.

In addition to our range of tubular gauge glasses we supply flat glasses in both plain and reflex types and glass and Perspex gauge glass guards.

Normal gauge glass fittings require specially moulded packing rings for correct installation and to meet requirements we stock a wide range of rings in conical, hexagonal, round and square sections. In addition, we can supply millboard, mica and compressed fibre cut pieces and gaskets, for use with the flat gauge glass fittings.

Supplied

In standard lengths from 75mm to 915mm. Other lengths can be cut as required. In diameters from 12.5mm to 37.5mm. Gauge glass rings can be supplied in conical, hexagonal, round and square section forms.