

# **beldam lascar seals limited**


**Lascar Works, Hounslow, Middlesex, England TW3 3JL**

Tel 020 8570 7722 Intl Tel +4420 8570 7722

Fax 020 8570 4438 Intl Fax +4420 8570 4438

[www.beldamlascarseals.co.uk](http://www.beldamlascarseals.co.uk)

## **beldam glascar XL packing**

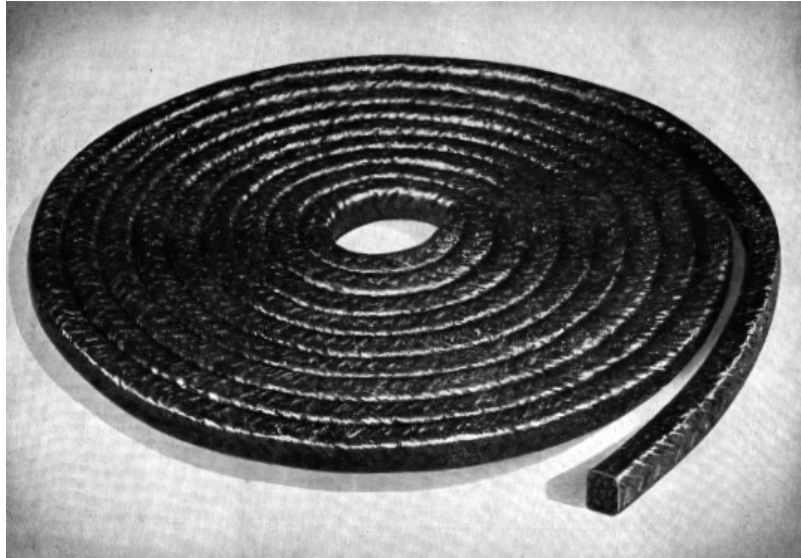

**beldam glascar XL packing** is manufactured from texturised multi-strand continuous filament E glass yarns. These yarns are plaited on the lascarlok principal, lubricated with mineral oil and graphite.

**beldam glascar XL packing** is recommended for use on pumps reciprocating and rotary, valves and static sealing applications.

**beldam glascar XL packing** is suitable for use with Water, Mild Acids, Alkalis, Oils, Solvents and many Chemicals.

Maximum Temperature	480°C
Maximum Pressure	140 bar
pH Range	3 - 12
Maximum Shaft Speed	15 m/s

Cross Section			Lengths
3 mm	to	11 mm	15 m
1/8"	to	7/16"	
12 mm	to	25 mm	7.5 m
1/2"	to	1"	