

beldam lascar seals limited


Lascar Works, Hounslow, Middlesex, England TW3 3JL

Tel 020 8570 7722 Intl Tel +4420 8570 7722

Fax 020 8570 4438 Intl Fax +4420 8570 4438

www.beldamlascarseals.co.uk

beldam lascarthene jointing 5160

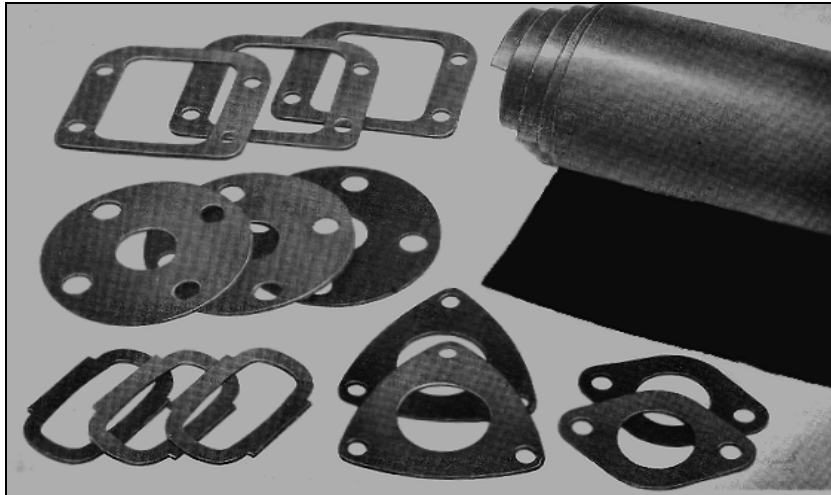

beldam lascarthene jointing 5160 is specially compounded to withstand continual flexing, a necessary feature in a reducing valve diaphragm and it will also resist, without ageing or deterioration, prolonged contact with water at high temperatures and steam.

beldam lascarthene jointing 5160 is mainly for use as a reducing valve diaphragm, but it is also suitable as a resilient joint for hot water and low temperature steam on heating vessels, vats and pipeline flanges.

Colour	Black
Finish	Cloth/Plate
Hardness IRHD	67° - 73°
Tensile (MPa)	9.0 min
Elongation (%)	300 min
Compression Set (%)	20 max
Specific Gravity	1.25 ± 0.02
Standards	Tested to BS EN 681-1 Type WA & "WC
Temperature	150°C max

Standard size sheets 1.2 m x 2.4 m, rolls 1.22 m or .915 m wide
Thicknesses from 0.75 mm up

Available in sheet, roll, strip or cut joints