

# beldam lascar seals limited


Lascar Works, Hounslow, Middlesex, England TW3 3JL

Tel 020 8570 7722 Intl Tel +4420 8570 7722

Fax 020 8570 4438 Intl Fax +4420 8570 4438

www.beldamlascarseals.co.uk

## beldam lascaroilite jointing

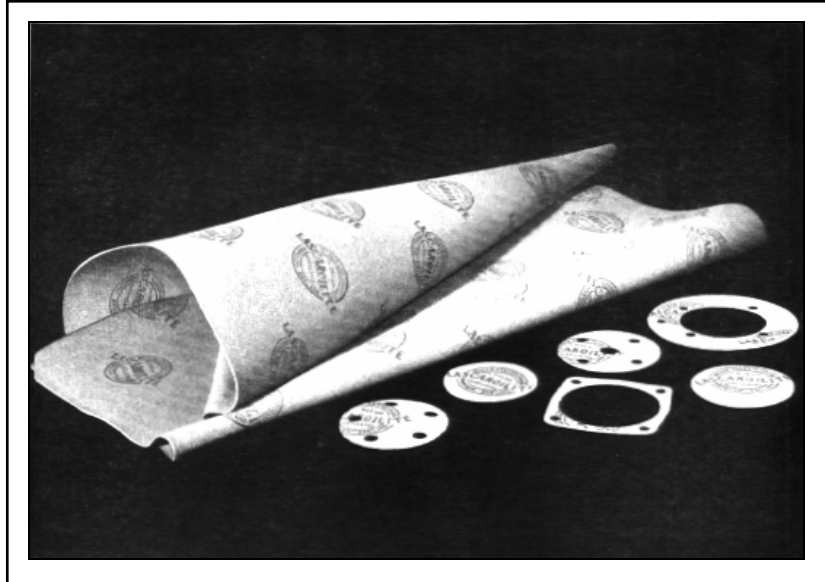

**Beldam lascaroilite jointing** has the resilience of cork and yet avoids its adverse physical properties.

**Beldam lascaroilite jointing** is highly resistant to plastic flow and liquid penetration and has low thermal and acoustical conductivity. It combines resilience with strength and stability.

**Beldam lascaroilite jointing** forms an ideal joint where few holding down bolts are available. It is recommended for low internal pressures and rough surfaces and has a high resistance to acetone, animal and vegetable fats and oils, xylol, petrol and aviation fuels, paraffin, refrigerants and transformer oils.

**Beldam lascaroilite jointing** should not be used with steam and mineral acids.

Max. Temp	120°C	Max. Pressure	40 bar
-----------	-------	---------------	--------

Thicknesses	mm	0.8	1.5	2.0	3.0	4.5	6.0
	ins	1/32	1/16	-	1/8	3/16	1/4

Sheet sizes	1.5 m x 1.0 m	(60" x 40")
-------------	---------------	-------------

Can also be supplied in cut joints, packing and tape form.