

beldam lascar seals limited


Lascar Works, Hounslow, Middlesex, England TW3 3JL

Tel 020 8570 7722 Intl Tel +4420 8570 7722

Fax 020 8570 4438 Intl Fax +4420 8570 4438

www.beldamlascarseals.co.uk

beldam lascarflon thread seal

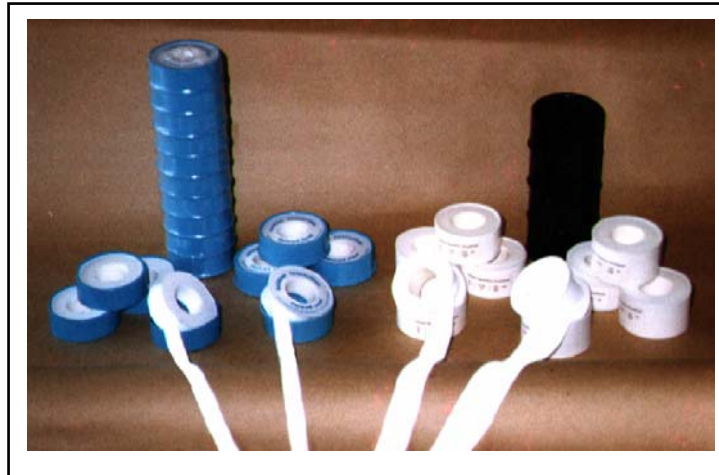

beldam lascarflon thread seal has been developed as an effective sealing medium for threaded pipe joints.

beldam lascarflon thread seal is manufactured from Polytetrafluoroethylene (P.T.F.E.), which is an inert non-toxic thermo plastic with a very low co-efficient of friction. This latter property ensures that joints can easily be broken after very considerable periods of time.

beldam lascarflon thread seal is effective with pipe joints made from a wide variety of materials and for use with such diverse fluids as water, acids, alkalis, oils, solvents, steam, gases and being oil free, is also suitable for use with oxygen.

beldam lascarflon thread seal possesses exceptional thermal stability, substantially retaining its physical properties within the temperature range shown below.

Temperature range

-268°C to +300°C

Specification

BS7786:1995:Grade L

Supplied

12 mm x 12 m x 0.075 mm	1/2" x 480" x 0.3"
19 mm x 12 m x 0.075 mm	3/4" x 480" x 0.3"
25 mm x 12 m x 0.075 mm	1" x 480" x 0.3"